



**C | 4i**

| ä ä x  
 x É 9 y ß  
 x ... a' y [% Q < k » % Q <  
 x ¶ • y ' y v ' k 9 ' k ? è ' k "  
 '   
 x

**C | 5 é**

+ (< 9 ^ ^ 9 < , © ç = / 6 É 9 Ü ~ D } k ç y µ 9 8 < G I k Ä Ä Ý ä ä  
 œ fož 4 © ç D } © • % Á ç k x Ô Á ç C ö œ Á ç ^ • ò — ‹ ož Ý ä | ä k - Ø Û Ó — ‹ k ' ñ  
 • ½ k â Ý a U ä 4 D } U ' Á k w • x 4 D } . xož ¶ • y ' k , ... a ' o • v ' o • 9 '  
 o • ? è ' C " ' k ¾ © ' š 4 4 . D } — ž I ô ož

**1 Y æ =**

Î Þ Ô 8	Î ´ Ô 8 ÿ (1)	Î Þ Ô W ÿ	£ Ü Î Þ ' (2)	] ´ (3)	´ ) d	1 Y
					220Vac	
24 V	176 ~ 305 Vac 190 ~ 250 Vdc	0 ~ 2.0 A	48 W	85.0%	0.96	EBV-048S024SVF
36 V	176 ~ 305 Vac 190 ~ 250 Vdc	0 ~ 1.34 A	48 W	86.5%	0.96	EBV-048S036SVF
48 V	176 ~ 305 Vac 190 ~ 250 Vdc	0 ~ 1.0 A	48 W	88.0%	0.96	EBV-048S048SVF

I u g h))) • š 9 8 y < G I ! " ))) \$ Û • š 9 8 y < G lož  
 g h W • y µ 9 8 y < G I k ç < G I ¶ y µ 9 8 g ! Ô - @ f † ' ì ¼ ç hož  
 g h y i Ú ^ y < G I k ç ú g ! Ô - @ f † • " hož

**Î ´ 4i x**

? d	£ 3 š	À 1 š	£ Ü š	Ô I
y µ 9 8	176 Vac	-	305 Vac	190 ~ 250 Vdc
y µ È ä 8	47 Hz	-	63 Hz	

¥ v - - 0.70 mA IEC60598-1; 240Vac/60Hz -- 5 0

Ĥ 4i x

Ŧ d	£ 3 š	À 1 š	£ Ü š	Ô I
~ ... v g/ Zh	-	-	0.029 A <sup>2</sup> s	< G I k - ê " g Õ Ñ o h k / V Q / V Q k 4 Õ ž • # f Y z ! Õ ĩ @ f ~ ... v ¼ ž
ä œ f	0.9	-	-	220-240Vac, 50-60Hz, 70%-100% ž ú
È ´ f â 1	-	-	12%	g d = h

Ĥ p4i x

Ŧ d	£ 3 š	À 1 š	£ Ü š	Ô I	
ÿ ß 9 ð †	-5%Vo	-	5%Vo	ž ú	
È ÿ ß 9 ¼ f (pk-avg) EBV-048S024SVF EBV-048S036SVF EBV-048S048SVF	- - -	- - -	2.0 V 2.5 V 2.5 V	ž ú ož " P f ~ 3 . ` k ! Ú ^ k Ÿ ß w Ä f , G ĩ y f , † ož	
o ĩ 9	-	-	5%Vo	ž ú	
ž Á <sup>2</sup> ... ä	-	-	±1%	ž ú	
ž ú <sup>2</sup> ... ä	-	-	±3%		
• Ñ o ž •	-	-	0.5 s	< G I k 100% ž ú	
Á € •	ÿ ß ž [	-	-	8%Vo	ž • ' ž • y 1 A/µs
	ú 3 ž •	-	-	10 ms	ž ú y 25% ~ 100% ž ú
" † © f	-	0.03%/ ¢	-	Ó " = 0 ¢ ~ Tc Á Ý ›	

I u ñ Ä Á @ f ® " † q Õ Ñ ñ O y Á ° > k Ô ð h ¢ " Û ož

P á é

Ŧ d	£ 3 š	À 1 š	£ Ü š	Ô I
ä @220Vac: EBV-048S024SVF EBV-048S036SVF EBV-048S048SVF	83.0% 84.5% 86.0%	85.0% 86.5% 88.0%	- - -	ž ú k q ê "
u ® — { ž ž •	-	871,000 Hours	-	< G I k ê " - k ž ú 3 / 2 . * ( 1 ,
. x ž •	-	104,000 Hours	-	< G I k ž ú k Ó " - k ! Õ ĩ @ f . x ¼ ž

## P á é


?	£ 3 š	À 1 š	£ Ü š	Ô I
• Ó “	-40°C	-	+90°C	
À ‘ Ó “	-40°C	-	+75 °C	v Á ‘ ñ + • Á ‘ Ó “ ~ † y 10% RH to 100%RH
¥ “ †	-40°C	-	+85°C	~ † y 5%RH to 100%RH
> * 6 * 2 ~ = ~ . D œ 2 ~ = ~ .		^ ^ ^ ^		m 5 ö > * ^ ^ ^ ^
Ô M	-	340 g	-	

I u ñ Ā Ā @ f ® “ † q Õ Ñ ñ O y Á ° › k Ô ð h ç “ Û ož


## μ Ô Ā × Ô

μ ù ç	× Ô
CE	EN 61347-1, EN61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	GB 19510.1, GB 19510.14
KS	KS C 7655
+ 3 / × Ô	Ô I
EN 55015/GB 17743 <sup>(1)</sup>	Conducted emission Test & Radiated emission Test
EN 61000-3-2/GB 17625.1	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS × Ô	Ô I
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips






› d • Ž

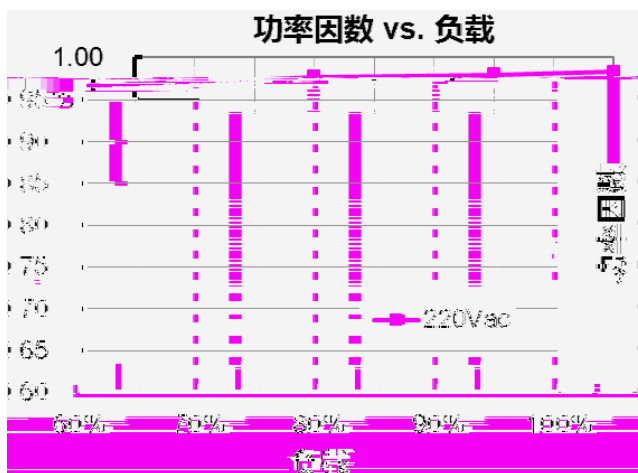

5 f G á • Ž

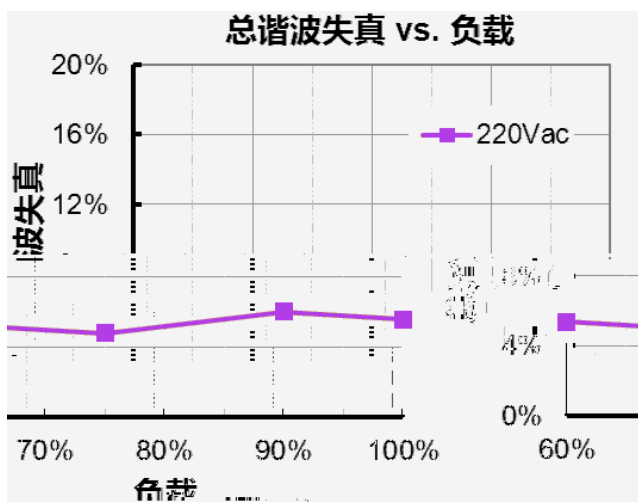

• õ x

?	?
v'	Ê Ö % "ož { ž L " ž k Ê Öož
9'	ý ß 9 k ' ò " • 8 Äož
? è'	Ê Ö % "ož ? è ž k D } — C oož ? è L " žž ? è L " žD@WÖož



' [ b ç

' X • N	• -	' X 5 é		
		• ù	Q	è
2019-07-30	A	G g		
2019-08-09	B	° Z ç n Õ h	g h • š 98 y < G lož	g h ))) • š 98 y < G I! " ))) \$ Û • š 9 8 y < G lož
		Ñ ã £		¾ •