


## C | 4i

y | ä ä 93.5%  
 y Ý ä ý μ 98 g d < G l h  
 y É 9 ý ß  
 y ... a' y ç + ç Q < k ç + a Q <  
 y ¶ • y' y v' k 9' k ? è' k ""  
 y ý μ > 9' ý μ 9'  
 y / 6 9 ; 2 t D Ó k B x ~ C Ú J ê Ě  
 y 9 + 2 <  
 y U 9 è ) R G Y Y / k \* O \ O Y O U T . • « `   
 y v Å '

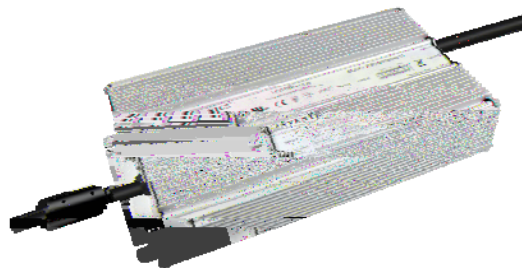

## C | 5é

+ 9 < 9 ^ ^ ^ 9 : © ç = / 6 É 9 Ü ~ D } k ç ý μ 98 249~528 < G l k Ä Ä Ý ä  
 ä œ fož 4 © ç D } © Ò ° C ñ « ° ^ • ò — « ož ä | C ' ñ • ½ k â Ý a U ä 4 D } U ' Å k  
 w • x 4 D } . xož ¶ • y ' k , ... a' o • ý μ > 9' o • ý μ 9' o • v' o • ý ß 9'  
 o • ? è' C "" k ¼ © ' š 4 4 . D } — ž l ô ož

## 1 Y æ =

Î Þ Ó 8	Î ' Ó 8 Ý (1)	Î Þ Ó W Ý	£ Ü Î Þ '	] ' (2)			1 Y (3)
					277Vac	480Vac	
48 Vdc	249~528Vac 352~500Vdc	0 ~ 12.5 A	600 W	93.0%	0.95	0.90	ESV-600S048ST
54 Vdc	249~528Vac 352~500Vdc	0 ~ 11.2 A	600 W	93.5%	0.95	0.90	ESV-600S054ST

l u g h • š 98 y < G l ê < J lož  
 g h y j Ú ^ y < G l ç ú g l Õ ~ @ f t • " hož  
 g h 9 + 2 < ož

## Î ' 4i x

? d	£ 3 š	À 1 š	£ Ü š	Ó l
ý μ 98	249 Vac	-	528 Vac	
ý μ Ě ä 8	47 Hz	-	63 Hz	
¥ v	-	-	0.7 mA	480Vac/ 60Hz
ý μ v	-	-	2.50 A	< G l k ç ú



P á é


?	d	£ 3 š	À 1 š	£ Ü š	Ô I
u ® — { ž ž •		-	203,000 Hours	-	

## μ Ô Â × Ô

EMS Standards	Notes
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

lu g h › á +3/ ö Ö kx 9 › • ° À © ĩ %² B ä k - È ` ° À Ä € — Ö g +3/ , ¼ G • ož  
 g h ø g ó 9 y i ž y 9 Ü ~ ÿ μ € \$ H } y ' N ª • • x á Y > y P K g ì k - } t ž Å ª g  
 " k Y ... 2 Ü ~ Ä B H } y ' Å • @ • / + ) ož - y i è e k Y > y P K g ì • Å  
 t M • x k Y È Ö ç + ª ~ ... ' kw G ' P K g ì € \$ \$ • U ' Å N † ož


## - w \* Ô t • Ž

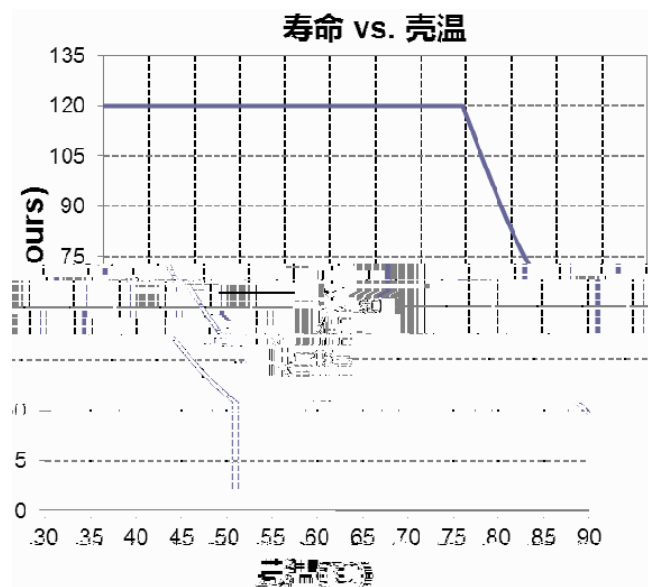



5 f G á • Ž

2 Ä ø

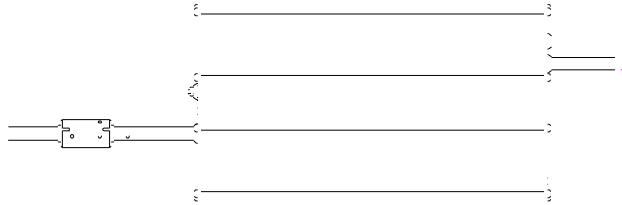

' [ b ø

' X • N	• -	' X 5 é		
		• ù	Q	è
2018-07-05	A	G g		